


ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0262

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

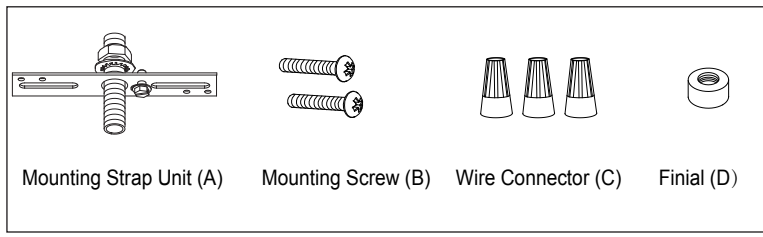


Installation Steps

Turn off the power at fuse or circuit box.

1. Attach the mounting strap unit (A) to the outlet box by using two mounting screws (B).
2. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire (bare wire) to the mounting strap unit (A) with the green ground screw. Then, depending on local code, connect it to the house ground wire with the wire connector (C).Carefully put all of the wires back into the outlet box.
3. Remove the finial (D) from the mounting strap unit (A).
4. Attach the ceiling pan to the mounting strap unit (A) by inserting threaded pipe into the center hole the ceiling pan and secure it with the finial (D).
NOTE: Depth of threaded pipe may need to be adjusted to properly fit the finial.
6. Install 2 x 60W max. medium base bulbs (not included). Check relamping label at socket area or packaging for maximum wattage allowed.

Turn on the power at fuse or circuit box.

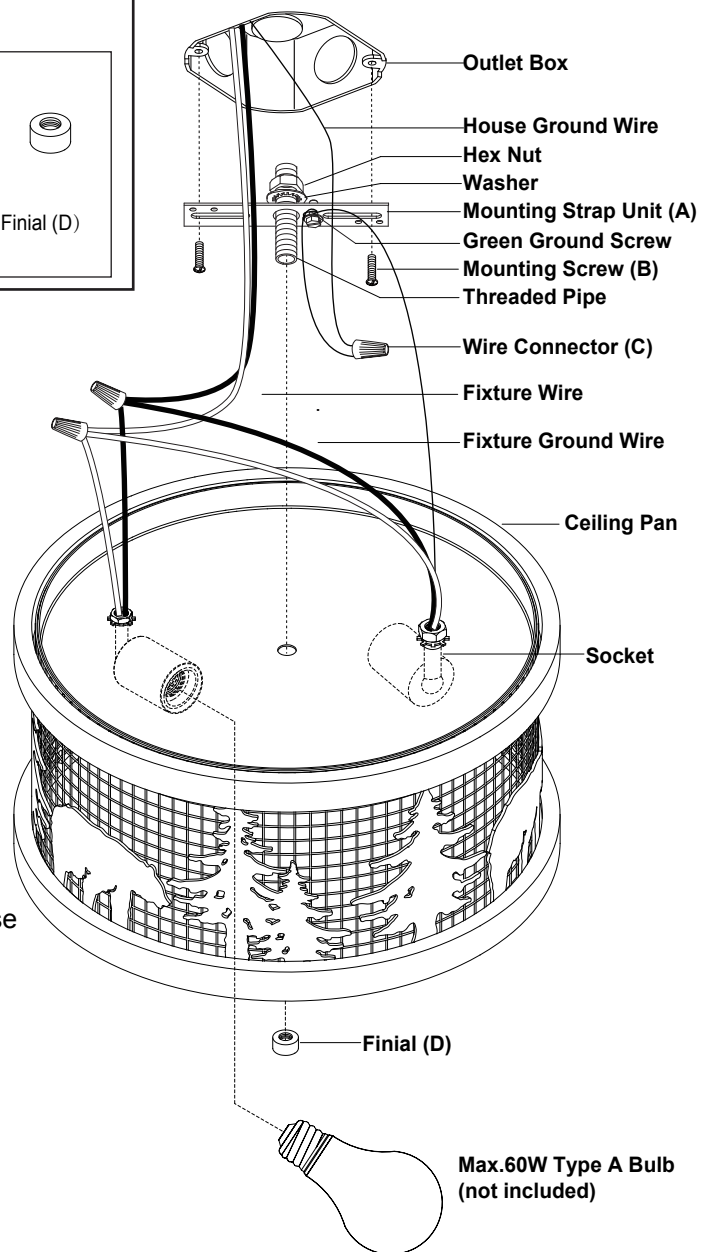


The following parts are available for re-order if damaged or missing.

Spare Parts List:

A metal mounting strap with a central threaded hole and two side holes.	Two screws with Phillips heads and threaded shafts.	Three conical wire connectors of varying heights.	A small cylindrical cap with a flared top.
Mounting Strap Unit (A)	Mounting Screw (B)	Wire Connector (C)	Finial (D)

Assembly Kit
6475MM (1 SET)

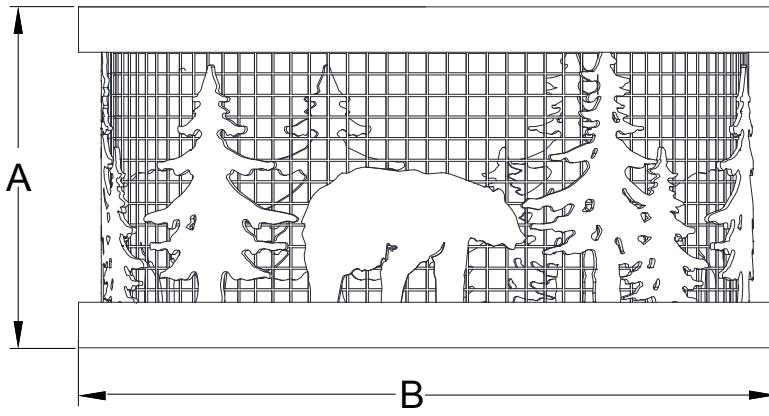

A: 5-7/8"

B: 12"